

G-Series

**8 x 2.5" Industrial SATA/SAS
6.0 Gb/s Hotswap Chassis**



- Steel Handle
- Patent Screwless HDD Mounting
- High Transfer Rate Up to 6.0 GB/s
- Power/Drive Activity LEDs
- Plug & Play, Hotswappable
- Heavy Duty Metal Body Material
- Support 2.5" SAS I/II & SATA I/II/III HDD



Screwless
Design



Thumb Screw
Design



6.0 Gb/s



OEM/ODM

G-Series *8 x 2.5" Industrial SATA/SAS 6.0 Gb/s Hotswap Chassis*

Specifications are subject to change without notice



G-180-JB

8 x 2.5" Industrial SATA/SAS
6.0 Gb/s Hotswap Chassis

G-180-ITX

8 x 2.5" Industrial SATA/SAS
6.0 Gb/s Hotswap Chassis

Form Factor

1U

1U

Dimensions

482.6 x 44 x 335 mm

482.6 x 44 x 335 mm

19" x 1.74" x 13.19"

19" x 1.74" x 13.19"

M/B Form Factor

2 x Centronics

Mini-ITX

3.5" Hotswap Bay

0

0

2.5" Hotswap Bay

8

8

2.5" Int. Drive Bay

1

1

Expansion Slots

n/a

1 (Low Profile)

Power Supply

150w open frame

1U Flex

Security

Dual lock down thumbscrews

Dual lock down thumbscrews

Indicator

Power on/off, HDD

Power on/off, HDD

Switch

Power on/off

Power on/off, Reset

Body

Steel

Steel

Handle

Steel

Steel

Standard Fan

2 x 40mm

2 x 40mm

Optional Fan

1 x 40mm

n/a

Specifications are subject to change without notice



Power On/Off Switch
Cooling Fan
1 x 40mm(Optional)
2 x Centronics
2 x 40mm
Cooling Fans




Supports
1U Flex PSU
1 (Low Profile)
Expansion Slot
2 x 40mm
Cooling Fans



Support 2.5" HDD/SSD

Patent Screwless HDD
Mounting Design

Features *G-180-ITX*

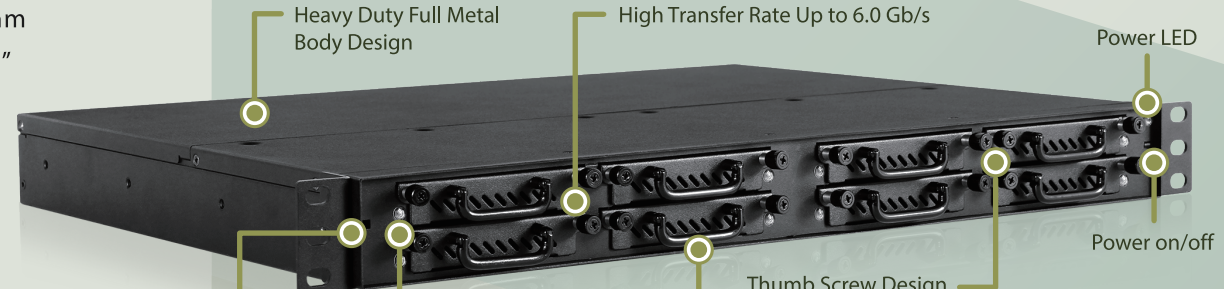

Reset Button

Heavy Duty Full Metal
Body Design

High Transfer Rate Up to 6.0 Gb/s


Power LED

Power on/off

Thumb Screw Design

Steel Handle

Drive Activity LEDs

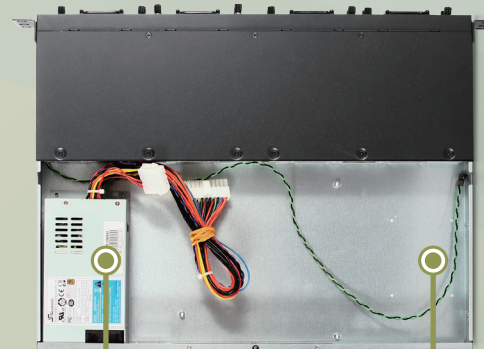

Supports 1U Flex PSU

Supports Mini-ITX M/B